

# E-PRO 3



The smallest member of the E-Pro downlight family, the EP3 includes a 3" non-IC remodel housing with a built-in driver and integrated light module trims.

## Performance

- Choose from three finishes - all EP3s include non-IC remodel housing
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 5-100% light control
- Eliminate up to 14 lamps replacements - long life SMD LEDs last up to 35,000 hours, compared to incandescent lamps with a rated life of 2,500 hours
- Energy Star compliant and c/ETL/us Listed for damp locations

## Construction

- Aluminum non-IC remodel housing, attached junction box with eight 1/2" knockouts houses remote driver
- Aluminum barrel with three spring steel ceiling clips
- Aluminum trim ring with durable powder coat finish
- Polycarbonate lens diffuses light

## Installation



- Cut-out template included (3-3/8" hole size)
- Requires 5" clearance in ceiling



## Photometrics

### EP3-E26-30-WH

Luminous flux	365Lm
Maximum intensity	215 cd
Input wattage	6W
Lumens per watt	60 LPW
Beam angle	77°

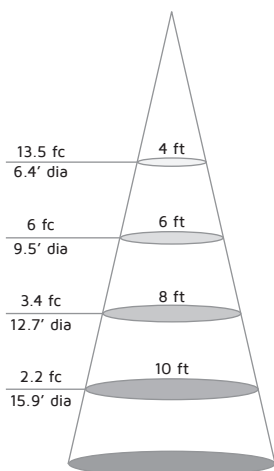

## Specifications

Series	EP3
Input voltage	120V AC, 60Hz
Color temperature	3000K
CRI	80+
Wattage	6W
Lumens	328Lm / 346Lm / 365Lm
Beam angle	77°
Dimming	Most triac and ELV dimmers
Housing	Aluminum
Lens	Frosted polycarbonate
Rating	c/ETL/us Listed, damp locations
Dimensions	3-15/16"D x 4-7/8"H x 11-1/4"L
Mounting	Recessed, non-IC remodel
LED type	14 x SMD 2323 LEDs
Rated life	35,000 hrs

## EP3 Downlight



**EP3-RE-30-DB**

EP3 - Dark Bronze (3000K)  
6W / 328Lm



**EP3-RE-30-BS**

EP3 - Brushed Steel (3000K)  
6W / 346Lm



**EP3-RE-30-WH**

EP3 - White (3000K)  
6W / 365Lm